


Furnizor: **Sc Trivolt Distribution SRL**  
Reg. com.: J23/3300/2016  
CIF: RO36421140  
Adresa: Strada Apusului nr 3 ( primul  
sens giratoriu Tehodor Pallady-  
Autostrada Soarelui), Catelu, Ilfov  
Banca: BRD  
IBAN: RO34BRDE441SV13182234410

### **ERSE CABLU LIY(ST)Y -TP 2 X 2 X 2.5, ERSE**

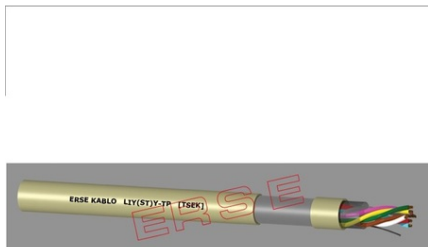

#### **Constructie**

1. CONDUCTOR IEC-60228, VDE 0295, EN 60228 Clasa 5-SC CUPRU ELEKTROLYTIC STRANDED
2. Izolare EN 50290-2-21 PVC Combinatul
3. Cod Culoare DIN 47100
4. E?uare PERECHI, PERECHI version straturi
5. Placarea cu Band? de PES
6. SCREEN cupru cositorit DRAIN din foc, Band? AL-PES
7. MANTAUA EN 50290-2-22 PVC Combinatul
8. MANTAUA Culoare RAL 7032 GREY

#### **CEI de ingrijire Nu**

- GOOD EMC \* CARACTERISTICI
- FLEXIBIL

- Diametrul exterior MICI
- Raza de indoire MICI
- Ignifug CARACTERISTICA

#### **Caracteristici TEHNICE**

1. CONDUCTOR Rezistenta  $0,22 \text{ mm}^2 = 79 \Omega / \text{km}$   
 $0,34 \text{ mm}^2 = 56 \Omega / \text{km}$   
 $0,50 \text{ mm}^2 = 39 \Omega / \text{km}$   
 $0,75 \text{ mm}^2 = 26 \Omega / \text{km}$   
 $1,0 \text{ mm}^2 = 19,5 \Omega / \text{km}$   
 $1,5 \text{ mm}^2 = 13,3 \Omega / \text{km}$   
 $2,5 \text{ mm}^2 = 7,98 \Omega / \text{km}$
2. Rezistenta izola?iei  $0,22 \text{ Am } 0,34 \text{ mm}^2 = 200 \text{ M}\Omega.\text{km}$   
 $0,50 \text{ mm}^2 = 20 \text{ M}\Omega.\text{km}$
3. MUTUAL capacitate  $0,22 \text{ mm}^2 = 110 \text{ PF} / \text{m}$   
 $0,34 \text{ mm}^2 = 110 \text{ PF} / \text{m}$   
 $0,50 \text{ mm}^2 = 120 \text{ PF} / \text{m}$   
 $0,75 \text{ mm}^2 = 120 \text{ PF} / \text{m}$   
 $1,0 \text{ mm}^2 = 130 \text{ PF} / \text{m}$   
 $1,5 \text{ mm}^2 = 140 \text{ PF} / \text{m}$   
 $2,5 \text{ mm}^2 = 150 \text{ PF} / \text{m}$
4. Impedanta (aprox.)  $78 \Omega$
5. Inductan?? (aprox.)  $0,67 \text{ mH} / \text{km}$
6. Curentul de Sarcina  $0,22 \text{ mm}^2 = 2,5 \text{ A}$   
 $0,34 \text{ mm}^2 = 4,5 \text{ A}$   
 $0,50 \text{ mm}^2 = 6,0 \text{ A}$   
 $0,75 \text{ mm}^2 = 13 \text{ A}$   
 $1,0 \text{ mm}^2 = 16 \text{ A}$   
 $1,5 \text{ mm}^2 = 20 \text{ A}$   
 $2,5 \text{ mm}^2 = 25 \text{ A}$
7. Tensiune de 022 si  $0,34 \text{ mm}^2 = 250 \text{ V}$   
 $> 0,50 \text{ mm}^2 = 300/500 \text{ V}$
8. Tensiunea de Testare 022 si  $0,34 \text{ mm}^2 = 1500 \text{ V}$   
 $> 0,50 \text{ mm}^2 = 2000 \text{ V}$
9. Indoire 10X Cablu Ø
10. Intervalul de Temperature  $-30^\circ \text{C} \sim +80^\circ \text{C}$
11. FLACARA TEST IEC 60332-1-2, VDE 0482-332-1-2 EN 60332-1-2
12. EMC \* EMC = Compatibilitate Electromagnetica \*

Pret: 0,00 lei (TVA inclus)

Detalii online: <https://www.materialelectrice.ro/cablu-liy-st-y-tp-2-x-2-x-2-5-erse>